
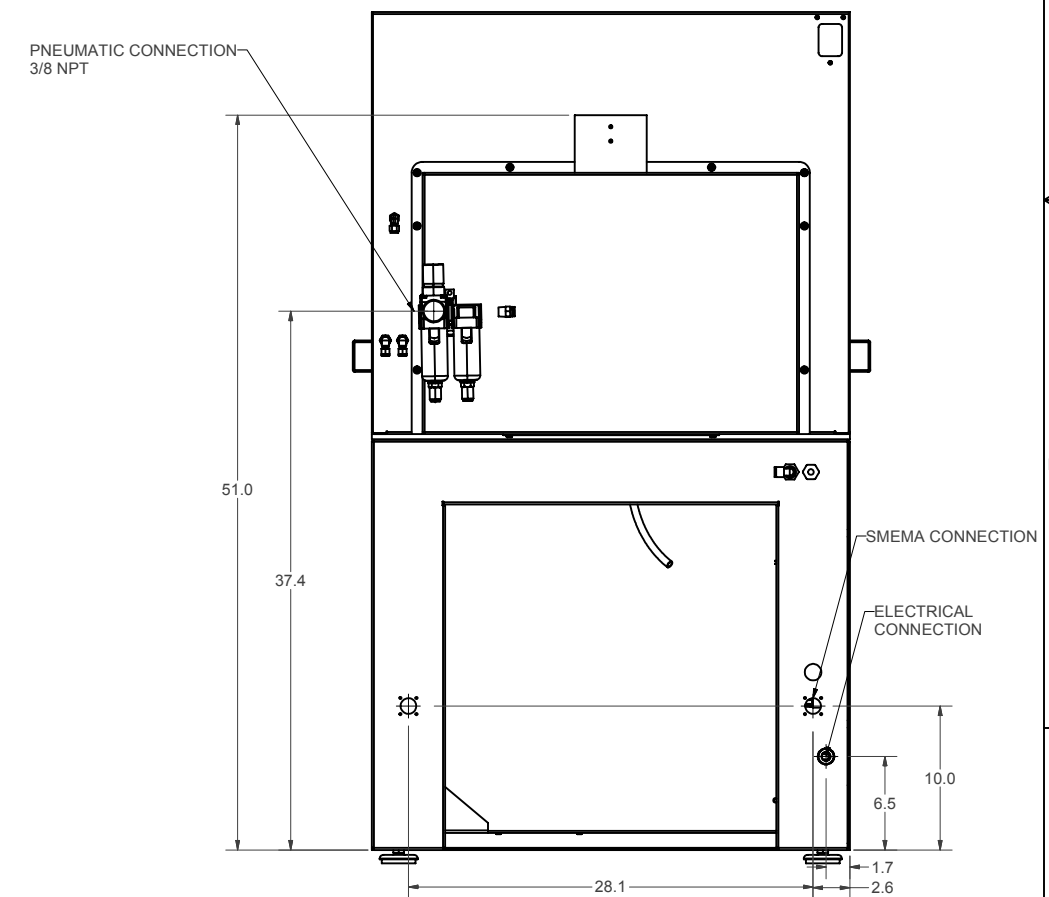
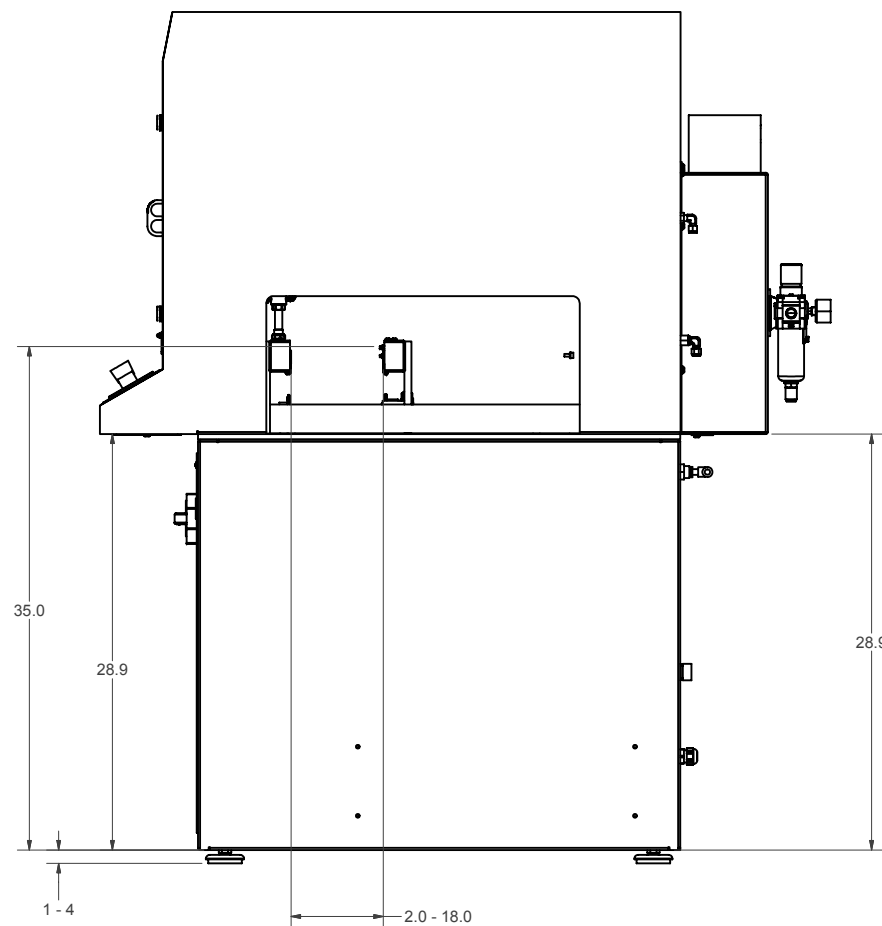
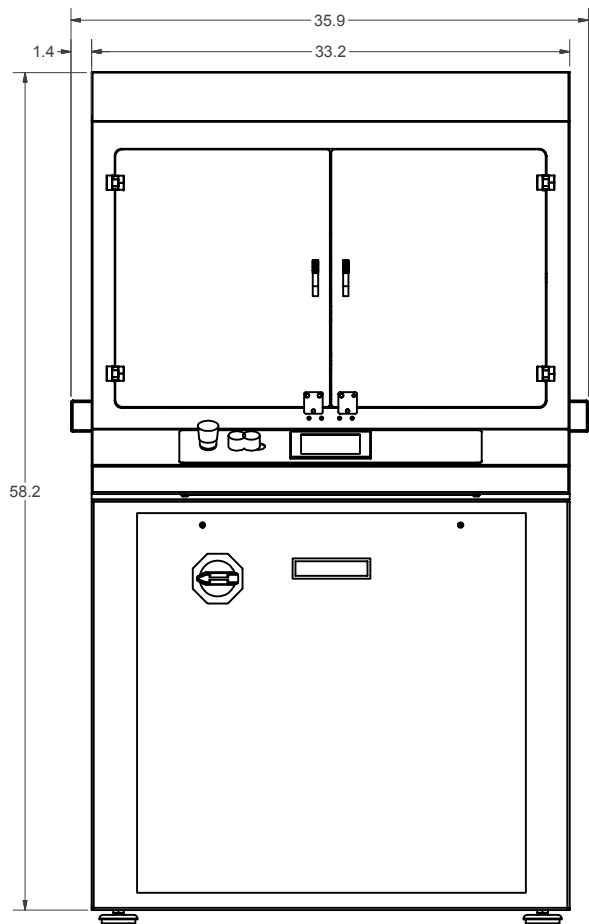



8 7 6 5 4 3 2 1

FACILITY REQUIREMENTS:

1. ELECTRICAL: 100 OR 115 OR 208 OR 240 VAC, 50 OR 60 HZ, 2,000 V-A, SINGLE PHASE. VOLTAGE SUPPLY MUST NOT VARY MORE THAN 10 TEN PERCENT (10%) FROM THE NOMINAL VALUES LISTED.
2. PNEUMATIC: CLEAN, DRY, OIL-FREE AIR, 80 PSI @ 5.5 SCFM MAXIMUM., 70 PSI MINIMUM.
3. EXHAUST: 5 INCH DIAMETER DUCT, 100 SCFM @ 1 INCH WATER COLUMN.
4. LOCATION: PRISM COATING UNIT REQUIRES A SOLID, LEVEL SURFACE AMBIENT TEMPERATURE NOT TO EXCEED 100 DEGREE FARENHEIGHT.
5. WEIGHT: 900 LBS MAXIMUM.

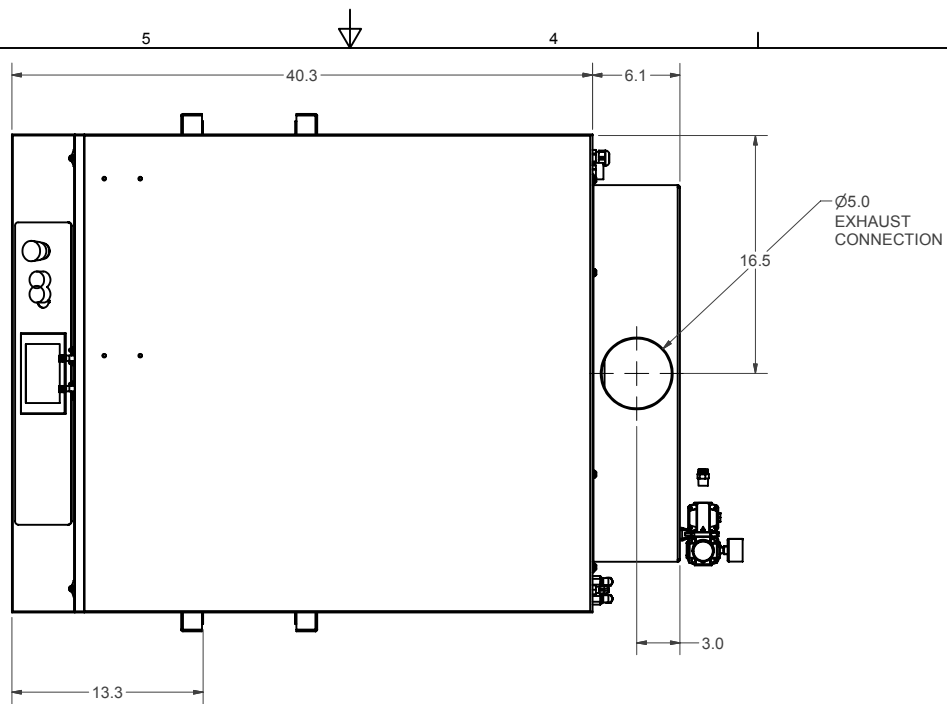

TOLERANCES UNLESS OTHERWISE NOTED:		DRAWN		8/16/2005		 ULTRASONIC SYSTEMS, INC. 135 WARD HILL AVENUE HAVERHILL, MA 01835	
DEC. X ± .03		DDE				TITLE	
DEC. XX ± .01		CHECKED				Prism 100 Facilities	
DEC. XXX ± .005		QA				SIZE	
ANGLES: ± 1/2'		MFG				DWG NO	
THIRD ANGLE PROJECTION		APPROVED				Prism100_Facilities	
THIS DRAWING AND THE SPECIFICATIONS CONTAINED HEREIN ARE CONFIDENTIAL AND PROPRIETARY. THEY ARE THE PROPERTY OF ULTRASONIC SYSTEMS, INC. AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. THIS DRAWING IS AN UNPUBLISHED WORK PROTECTED UNDER FEDERAL COPYRIGHT.		MATL		SEE NOTE 1.		SCALE	
		FINISH		SEE NOTE 2.		REV	
						1	
						SHEET 1 OF 1	

8 7 6 5 4 3 2 1